

End-to-End MPLS for Operational Telecom made easy


• Tailored for industrial applications • Intuitive and simple • Reliable operations in harsh environments

End-to-End MPLS with integrated network management

- DIN-rail mountable
- ATEX approved

- Compact size
- Optical 1G LAN ports (SFP)

- Native MPLS-TP support
- 1G or 10G WAN links
- SD card for easy configuration swap

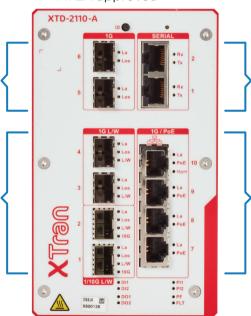

- Extended temperature range through passive cooling
- Serial ports RS232/422/485
- Electrical 1G LAN ports with PoE+
- Support for L2 & L3 VPN
- EMC hardened (IEEE 1613, IEC 61850-3, EN50121-4)


• Digital Input & Output




Redundant 24-57VDC Power input

Part of the XTran Eco System

• Scalability in port count and bandwidth

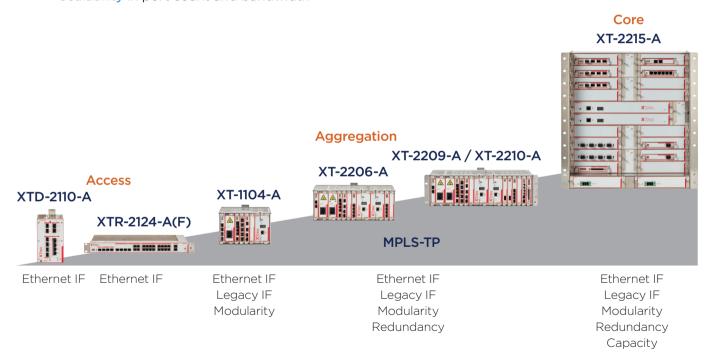


End-to-End MPLS with integrated network management

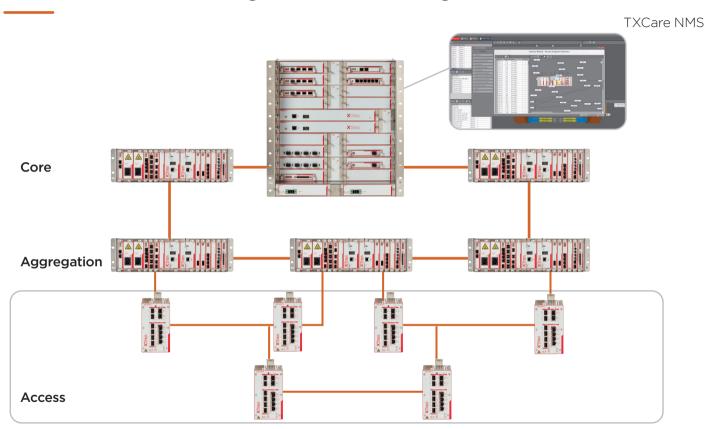

Intuitive Network Management System

- Managed by TXCare
- Wizard based
- End-to-End provisioning



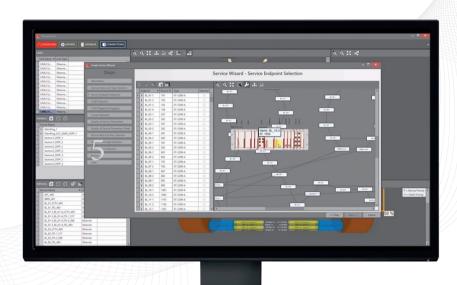

Discover the features of the XTran XTD-2110-A node: www.youtube.com/otnsystems







© 2024 | Belden and its affiliated companies claim and reserves all rights to its graphic images and text, trade names and trademarks, logos, service names, and similar proprietary marks, and any other intellectual property rights associated with this publication. BELDEN' and other distinctive identifiers of Belden and its affiliated companies as used herein are or may be pending or registered or unregistered trademarks of Belden, or its affiliates, in the United States and/or other jurisdictions throughout the world. Belden's trade names, trademarks, logos, service names, and similar proprietary marks shall not be reprinted or displayed without Belden's or its affiliated companies' permission and/or in any form inconsistent with Belden's business interests. Belden reserves the right to demand the discontinuation of any improper use at any time.